


**[11]** Pritisnite on ili off taster na daljinskom upravljaču.



**[12]** Prigušenje svetla: (1) Pritisnite jedanput: svetlo će se upaliti (2) Pritisnite opet: Intezitet svetla će početi da se menja(3) Pritisnite treći put za prekid promene jačine svetlosti na željeni nivo.

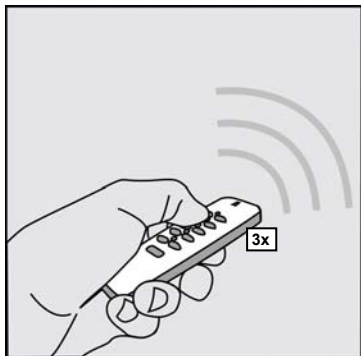

**⚠ NAPOMENA:**

- Ovaj proizvod je namenjen instalaciji na zid, iza postojećeg zidnog prekidača i mora da radi makar sa jednim COCO predajnikom.
- Otvor na zidu mora da ima dubinu minimum 40 mm.
- Ovaj proizvod je prigušivač svetla(dimer)/prekidač:daljinski upravlja osvetljenjem u objektu. Možete da nastavite da koristite postojeći zidni prekidač za ručno paljenje/gašenje osvetljenja u objektu.
- Prigušenje svetla sa postojećim zidnim prekidačem: (1) Pritisnite "on" taster na daljinskom upravljaču. (2) Ugasite svetlo preko prekidača na zidu. Jačina svetla će početi da se menja. (3) Pritisnite "off" taster za odabir željene jačine. Posledanja izabrana jačina svetlosti će biti memorisana u uređaju.
- Da bi se sprečio uticaj jednog uređaja na drugi, preporučuje se minimalna razdaljina između njih - 50 cm
- Bežični sistem se može proširiti drugim COCO prijemnicima ili transponderima.
- Vaš COCO transponder može da ima taster "group" s kojim možete da palite/gasite više uređaja istovremeno. Ponovite korak [7 - 8] i pritisnite "group" dugme na transponderu tokom koraka [8].
- Resetovanje koda: (1) Briefly press the connect button. (2) Press the "off" button of the code you want to delete from the memory. (3) To confirm, the dimmer switches on and off two times.
- To delete all the stored codes (resetting the memory): (1) Hold in the search mode button. (2) The indicator begins flashing after approx. 7 seconds. (3) Release the button. (4) Briefly press the search mode button again. (5) To confirm, the dimmer switches on and off two times.
- If the product does not work:
  - Reset the memory (see previous line) and set the code from the transmitter again (repeat [7 - 9]).
  - Check whether the indicator is lit; if not, there may not be any power to the product or the electronic fuse may have blown (in the latter case the product must be replaced).

### Safety instructions

- Warning: Even if the product is switched off, voltage may still be present at the switched socket!
- Never use COCO products for life support systems or other applications in which equipment malfunctions can have life-threatening consequences.
- Do not connect any lights or other equipment that consume a total of less than 40 Watts or more than 210 Watts. Connecting incorrect equipment can cause defects, a short circuit and fire.
- Only connect equipment that is suitable for dimming.
- Only connect incandescent lamps or 230 Volt halogen lamps. This product is not suitable for low-energy light bulbs or fluorescent lighting.
- Do not connect any lights or devices that require a transformer.
- This product has an electronic fuse that automatically interrupts the power in the event of a short circuit, overload (more than 2 A) or at a temperature above 130 °C. If this occurs, the product must be replaced. A defective electronic fuse is not covered by the warranty.
- Do not expose this product to excessive heat, direct sunlight or moisture.
- Do not attempt to repair this product. If the product is damaged or if you are in doubt about the proper operation, take the product back to the place of purchase.
- Do not use the product in damp areas. Clean the device with a clean cloth.

### Wireless

- This product works using a radio signal that passes through walls, windows and doors. The range is maximum 75 metres in the open air. The range indoors is strongly influenced by local conditions such as concrete, glass and metals. On average, the indoor range is approximately 30 metres.
- New double glass often includes a thin metallic layer. This type of glazing (“**HR glass**”) allows most visible light to pass through but has a negative impact on radio signals. If there is HR glass between the transmitter and receiver, you should expect a significant reduction of the range of the wireless signal.
- This product operates at a frequency of 433.92 MHz. It complies with the essential requirements and other conditions of R&TTE Directive 1999/5/EC and can be used in all EU countries.
- There may be restrictions on the use of this device outside the EU. If this device is used outside the EU, check whether the device complies with the local directives.



This product complies with the essential requirements and other relevant provisions of the applicable European directives. The Declaration of Conformity (DoC) is available at [www.coco-technology.com](http://www.coco-technology.com).



If possible, submit this product for recycling after use. Do not dispose of the product with household trash.

**Warranty and copyright**

This device is covered by a two-year warranty that begins on the day of purchase. Visit [www.coco-technology.com/warranty](http://www.coco-technology.com/warranty) for additional information. Reprinting of (portions of) this manual without permission from Pan-Trade International B.V. is expressly prohibited.



PAN-TRADE INTERNATIONAL B.V.

P.O. BOX 126  
4760 AC ZEVENBERGEN  
THE NETHERLANDS  
www.coco-technology.com



**Declaration of Conformity**

Pan-Trade International BV declares that the COCO product, model:

type designation	AWMR-210 MINI BUILT-IN DIMMER/SWITCH
item number	74009

is in compliance with the essential requirements and other relevant provisions of directives R&TTE 1999/5/EC, EMC 2004/108/EC and LVD 2006/95/EC and is compatible with the standards EN 300 220-1/3, EN 55015, EN 301 489-1/3 and EN 60950.

Manufacturer / Authorised representative,



M.A. Hoekstra, managing director  
Zevenbergen, 2008-01-30